

Industrial Media Converter



The PLANET IFT-802 industrial 10/100Base-TX to 100Base-FX Media Converter is a cost-effective solution for the converting 10/100Base-TX (Auto MDI/MDIX) to 100Base-FX cabling. It provides two power inputs that can be connected simultaneously to the DC power sources. That is, if one power input fails, the other one acts as a backup.

The PLANET IFT-802 also provides relay alarm outputs to warn when the port link failure, so the technician can respond quickly with appropriate emergency operation procedures.

Also, there are DIP-switches to set the operation mode for relay alarm, Fiber ports, link loss forwarding function, and UTP operation mode.

KEY FEATURE

Hardware Feature

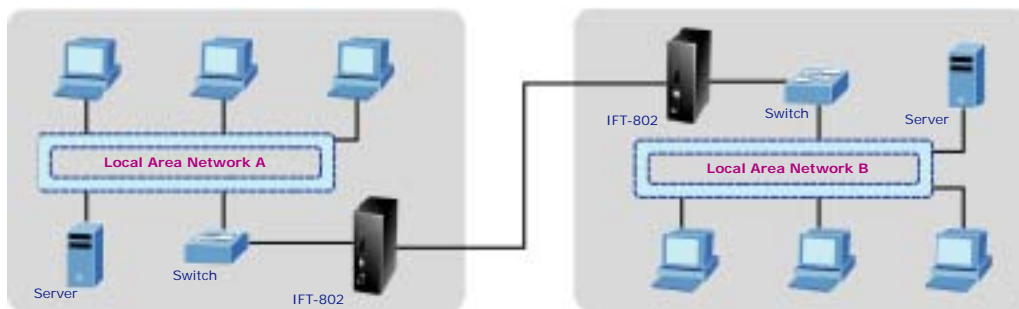
- UTP to Fiber Media converter
- Auto Negotiation Speed and Half/Full Duplex
- Supports 12 to 48V DC power inputs
- TX port support Auto MDI/MDI-X
- Relay alarm output for port link failure
- IEEE 802.3x flow control support
- Flow control on full-duplex
- Back pressure on half-duplex
- Built-in Link Lose Forwarding Technology
- DIN-Rail or wall mountable
- DIP-switches to set the operation mode and Link- Lost- Forwarding function.

Industrial Conformance

- 12 to 48V DC, redundant power with polarity reverse protect function and connective removable terminal block for master and slave power
- 0 to 60 Degree C operation temperature
- IP-30 Aluminum case
- EMI complies with FCC Class A, CE EN6100-4-2, CE EN6100-4-3, CE EN6100-4-4, CE EN6100-4-5 and CE EN6100-4-6
- Stability testing with IEC60068-2-32(Free fall), IEC60068-2-27(Shock) and IEC60068-2-6(Vibration)

SPECIFICATION
Product Industrial Media Converter

Model	IFT-802
Hardware	
Standard	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100Base-FX IEEE 802.3x Flow Control and Back pressure
10/100Mbps TP	CAT-3/5 (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support
Fiber Connector	SC Multi-Mode model
Switching Architecture	Store and forward
Fiber Parameters	Fiber Core: Multi-Mode (62.5/125μm, 50/125μm) Wavelength: 1310nm Fiber Distance: Multi-Mode Fiber 2Km (Available on Multi mode model)
Link Lost Forward	TX to Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber to TX: If Fiber port link down, the media converter will force TX port to link down.
DIP Switch	DIP Switch 1: ON: Enables Port Alarm OFF: Disables Port Alarm DIP Switch 2: ON: Enables LLF (Link Lose Forwarding) OFF: Disables LLF (Link Lose Forwarding) DIP Switch 3: ON: 100Base-FX Half-mode OFF: 100Base-FX Full-mode DIP Switch 4: ON: 100Base-TX Full-duplex mode OFF: Auto-Negotiation
LED	Power (Green), Power1 (Green), Power2 (Green), Fault (Orange) Fiber: Link / Activity (Green) Half / Full Duplex (Orange) TX: 10/100(Green) Link (Green) Half / Full Duplex (Orange)
Power Supply	12 to 48 V DC, redundant power with polarity reverse and overlap current protection function
Power Consumption	4.6 Watts
Installation	Provide DIN rail kit and wall mount ear for 3-way installation
Operating environment	0 to 60 Degree C, 5%~90%RH (Non-condensing)
Storage environment	-40 to 85 Degree C, 5%~90%RH (Non-condensing)
Dimension (W x D x H)	54 x 105 x 155 mm
Emission	FCC Class A, CE mark
Stability testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)

APPLICATIONS

ORDERING INFORMATION
IFT-802 Industrial 10/100Base-TX to 100Base-FX Media Converter