

QSFP28-ZR4-100G

TransOpto

**QSFP28, 100GbE-ZR4, 4x25.8 Gbps, 80km
1310nm, 34dB, SM**



FEATURES

- Supports 100GBASE 100GE;
- Lane bit rate 25.78 Gb/s 100GE
- Up to 100km transmission on SMF;
- LAN WDM laser and PIN receiver with SOA;
- High speed I/O electrical interface (CAUI-4);
- QSFP28 MSA package with duplex LC connector;
- Single +3.3V power supply;
- Typical power consumption 6.5 W;
- Operating case temperature: 0 to +70 °C;
- Support Multi-Pin function with IntL/RxLOSL and LPMoDe/TxDIS;

- I2C interface with integrated Digital Diagnostic monitoring;
- Compliant to IEEE 802.3bm and ITU-T G.959;
- Compliant to SFF-8636 and SFF-8679;
- Complies with EU Directive 2015/863/EU;

APPLICATIONS

- 100GBASE-ZR4 plus;

ALCADON AB
Sweden
alcadon.se
+46 8 657 36 00

ALCADON AS
Norway
alcadon.no
+47 23 17 78 80

ALCADON APS
Denmark
alcadon.dk
+45 45 70 70 77

ALCADON GMBH
Germany
alcadon.de
+49 431 36 30 40 34

ALCADON BV
Belgium
alcadon.be
+32 3 326 26 03

QSFP28-ZR4-100G

TransOpto

ABSOLUTE MAXIMUM RATINGS

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	TS	-40	85	°C
Supply Voltage	VCC	0	+3,6	V
Operating Relative Humidity	RH	-	+85	%

RECOMMENDED OPERATING ENVIRONMENT

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	TC	0	-	+70	°C	
Power Supply Voltage	VCC	3 35	3.3	3 465	V	
Power Supply Current	ICC	-	-	1.96	A	
Typical Power Dissipation	PD	-	-	6.5	W	
Aggregate Bit Rate	BRAVE	-	103 125	-	Gb/s	

OPTICAL CHARACTERISTICS

Transmitter Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Center Wavelength Lane 0	λ_0	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	λ_1	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	λ_2	1303.54	1304.58	1305.63	nm	
Center Wavelength Lane 3	λ_3	1308.09	1309.14	1310.19	nm	
Total Launch Power, 100GE	PALL	-	-	12.5	dBm	1
Average Launch Power per Lane, 100GE	PTX_LANE	3.5	-	8	dBm	1
Optical Modulation Amplitude (OMA), per Lane	PTX_OMA_ LANE	5.12		9.62	dBm	1

Transmitter Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Difference in launch power between lanes	PTX_Delta_LANE	-	-	3.6	dB	
Average Output Power (Laser Turn off)	POUT-OFF	-	-	-30	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio, 100GE	ER	8	-	-	dB	
Receiver	Symbol	Min.	Typ.	Max.	Unit	Notes
Center Wavelength Lane 0	λ_0	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	λ_1	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	λ_2	1303.54	1304.58	1305.63	nm	
Center Wavelength Lane 3	λ_3	1308.09	1309.14	1310.19	nm	
Damage threshold	Pdamage	5.5	-	-	dBm	
Average Rx Power per Lane, 100GE	PRx_LANE	-31.5	-	4.5	dBm	2
Difference in launch power between lanes	PRX_Delta_LANE	-	-	4.5	dB	
Rx average sensitivity	Rx_avesens			-30.5		
Los Assert	LosA	-40	-	-	dBm	
Los De-assert	LosDA	-	-	-31	dBm	
Los Hysteresis	LosH	0.5	-		dB	

Notes:

1. The optical power is launched into SMF.
2. M Measured with a PRBS 231-1 test pattern @25.78125 Gb/s, BER≤5E-5.


ELECTRICAL CHARACTERISTICS

High-Speed Signal: Compliant to CAUI-4 (IEEE 802.3bm)

Low-Speed Signal: Compliant to SFF-8679.

Transmitter (Module Input)		Min.	Typ.	Max.	Unit
Parameter	Symbol				
Differential Data Input Amplitude	VIN,P-P	85	-	900	mVpp
Differential Termination Mismatch		-	-	10	%
Differential input return loss (min)	RLd(f)	Compliance with IEEE802.3ba Equation (83A-5)			dB
Differential to common mode input return loss (min)	RLdc(f)	Compliance with IEEE802.3ba Equation (83A-6)			dB
LPMODE, Reset and ModSelL, V in low	VIL	-0.3	-	0.8	V
LPMODE, Reset and ModSelL, V in high	VIH	2.0	-	VCC+0.3	V
Receiver (Module Output)		Min.	Typ.	Max.	Unit
Parameter	Symbol				
Differential Data Output Amplitude	VOU,P-P	200	-	900	mVpp
Differential Termination Mismatch 1MHZ		-	-	10	%
Transition time, 20% to 80%	Tr Tf	12	-	-	ps
Differential output return loss (min)	RLd(f)	Compliance with IEEE802.3ba Equation (83A-7)			dB
Common to differential mode conversion return loss (min)	RLdc(f)	Compliance with IEEE802.3ba Equation (83A-8)			dB
ModPrsL and IntL, V out low	VOL	0	-	0.4	V
ModPrsL and IntL, V out high	VOH	VCC-0.5	-	VCC+0.3	V

PIN ASSIGNMENT

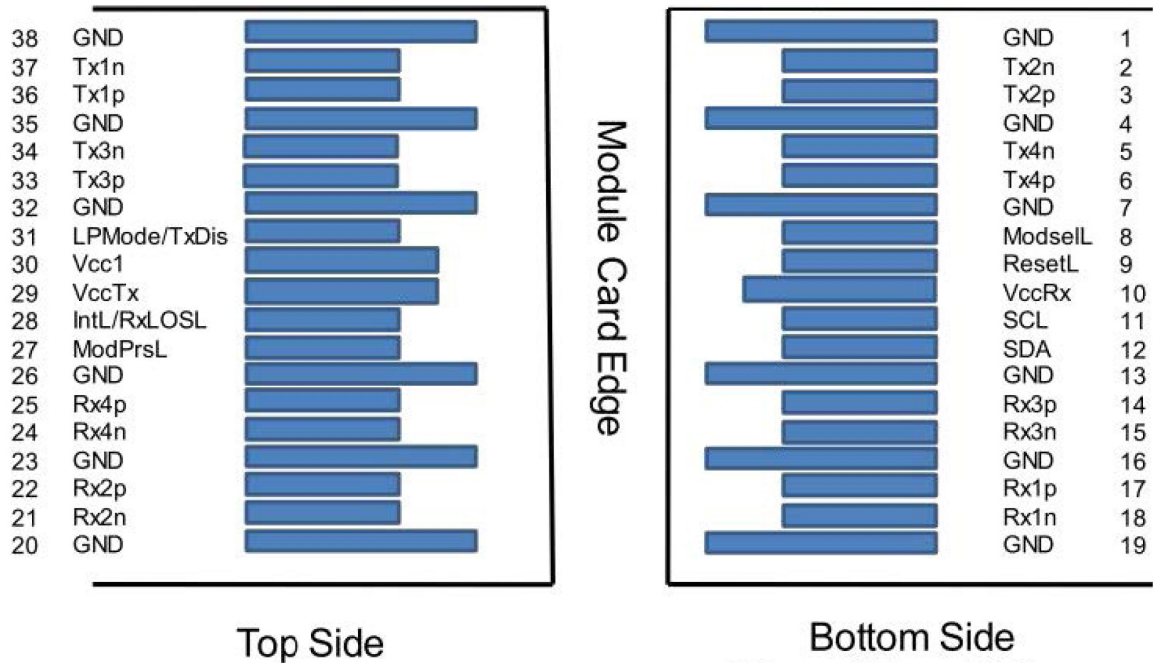

PIN DEFINITION

Pin	Logic	Symbol	Name/Description	Plug seq.	Notes
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data Output	3	
4		GND	Ground	1	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data Outnput	3	
7		GND	Ground	1	1
8	LVTLL-I	ModSelL	Module Select	3	
9	LVTLL-I	ResetL	Module Reset	3	
10		VccRx	+3.3V Power Supply Receiver	2	2
11	LVC-MOS-I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVC-MOS-I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3	
15	CML-O	Rx3n	Receiver Inverted Data Output	3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1
24	CML-O	Rx4n	Receiver Inverted Data Output	3	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3	
26		GND	Ground	1	1
27	LVTLL-O	ModPrsL	Module Present	3	
28	LVTLL-O	IntL/Rx_LO	Interrupt/Rx_LOS	3	
29		VccTx	+3.3V Power Supply Transmitter	2	2
30		Vcc1	+3.3V Power Supply	2	2

Pin	Logic	Symbol	Name/Description	Plug seq.	Notes
31	LVTLL-I	LPMode/Tx	Low Power Mode /Tx_Disable	3	
32		GND	Ground	1	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Output	3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Output	3	
38		GND	Ground	1	1

Notes:


1: GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.

2: Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in MSA. The connector pins are each rated for a maximum current of 1000 mA.

DIGITAL DIAGNOSTIC FUNCTIONS

Parameter	Range	Accuracy	Unit	Calibration
Temperature	0 to 70	+3		Internal
Voltage	0 to CVV	10%	V	Internal
Tx Bias Current Per Lane	0 to 100	10%	mA	Internal
Tx Output Power Per Lane	3.5 to 8	+3	dBm	Internal
Rx Power (Each Lane)	-31.5 to 4.5	+3	dBm	Internal

MECHANICAL DIMENSIONS

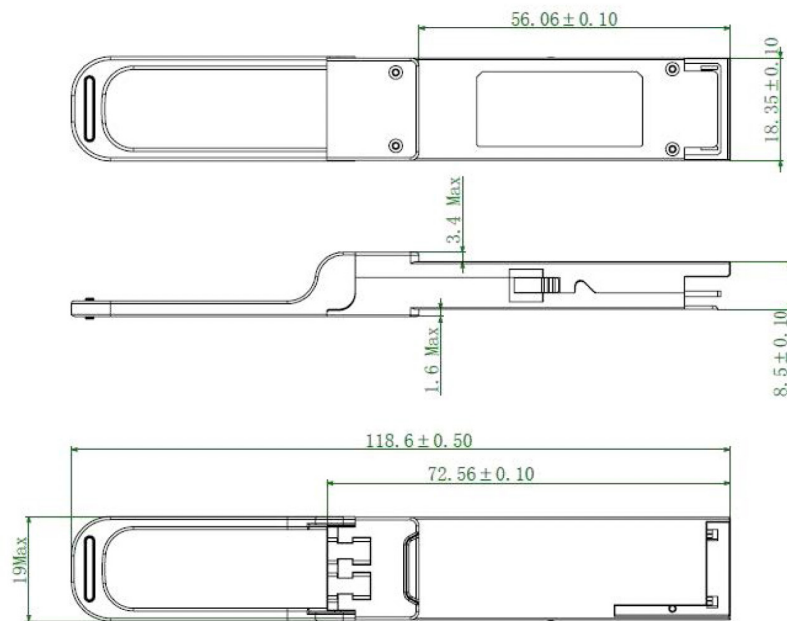



ESD

This transceiver is specified as ESD threshold 1kV for high speed data pins and 2kV for all others electrical input pins, tested per MIL-STD-883, Method 3015.4 /JESD22- A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

LASER SAFETY

This is a Class 1 Laser Product according to EN 60825 -1:2014. This product complies with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

Caution: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

ORDERING INFORMATION

Part Number	Product Description
QSFP28-ZR4-100G	QSFP28, 100GbE-ZR4, 4x25.8 Gbps, 80km 1310nm, 34dB, SM

Alcadon reserves the right to make changes to the products described without prior notice.
Alcadon does not assume any liability which may occur due to the use of the products described herein.
Drawings may not be to scale and are provided for general and informational purposes only.

ALCADON AB
Sweden
alcadon.se
+46 8 657 36 00

ALCADON AS
Norway
alcadon.no
+47 23 17 78 80

ALCADON APS
Denmark
alcadon.dk
+45 45 70 70 77

ALCADON GMBH
Germany
alcadon.de
+49 431 36 30 40 34

ALCADON BV
Belgium
alcadon.be
+32 3 326 26 03