



## tv connection cable with ferrite beads

### Product introduction

DKT now introduces a new series of connection cables. This is developed to face the problems in an ever increasement of the sources for interference at the subscribers home installations.



Type no.	Item no.	Length
TSF-A-1,5ZH	20160	1,5 m
TSF-A-3ZH	20163	3 m
TSF-A-5ZH	20165	5 m
TSF-A-10ZH	20167	10 m

### Technical specifications

Construction data		TSF-A-1,5ZH	TSF-A-3ZH	TSF-A-5ZH	TSF-A-10ZH
Inner conductor	∅ mm	CCS 1.02			
Dielectric	∅ mm	PE 4.75			
First overlapped foil		S-foil			
Foil coverage	%	100			
Braid		CCAM			
Braid coverage	%	77			
Outer sheath	∅ mm	6.8±0.2			
Jacket material		Halogen-free PVC			
Connectors		IEC-female - IEC-male			

Electrical data		TSF-A-1,5ZH	TSF-A-3ZH	TSF-A-5ZH	TSF-A-10ZH
Impedance	Ohm	75±3			
Return loss		Cat. B*			
Attenuation at 20°C (dB)	5 MHz	0.1	0.2	0.3	0.6
	50 MHz	0.15	0.3	0.5	1
	100 MHz	0.25	0.5	0.8	1.6
	200 MHz	0.4	0.8	1.1	2.2
	300 MHz	0.55	1.1	1.5	3
	470 MHz	0.7	1.4	1.8	3.6
	862 MHz	0.95	1.9	2.6	5.2
	1000 MHz	1	2	2.7	5.4
Transfer Impedance	5-30 MHz	Class A†			
Screening Effectiveness	30-1000 MHz	> 85 dB, Class A†			

#### Fulfilling standards

EN 50267, EN 50268 Smoke emission & fume density during fire

\* Return loss: EN 50083-4

† Screening efficiency: EN 60966-2-5: 2010-03

#### Advantages

- High screening effectiveness is necessary to avoid interference
- No toxic fumes in case of fire
- Ferrite beads eliminates noise from the braid

Scan the QR tag to get latest version of this datasheet on PDF.





## additional information

### Why ferrite attenuators?

The braid of the cable accumulates unwanted signals from the surroundings and transfers these to the recipient (receivers such as radios and TVs). If the recipient's tuner is not sealed from such HF signals, then these signals will transfer from the cable's shield to the tuner. When a cable has ferrite attenuators, the unwanted signal will only accumulate on that part of the cable between the connecting plug and the ferrite attenuator, and will thus not create problems.

SHIELDED AGAINST





DKTCOMEGA

### Why Class A attenuation on cable shielding?

With increasing complexity in the transmitted signals, the services are far more sensitive to interference than before. With a screening effectiveness exceeding the requirements for Class A, the installation have a very high level of resistance to interference, which leads to less pixelation and signal outage. In cases with LTE/4G signals then problems could accelerate if proper shielding is not done.

### Why halogen-free cable?

Halogens are a group of environmentally damaging elements. Examples of halogens are chlorine and bromine. These elements are released in installations and can be inhaled by those in the immediate vicinity. These elements are released if there is a fire in an installation and can then cause serious injury. This connection cable is manufactured without halogens, and thereby long-term damage as well as risks in case of fire are avoided.

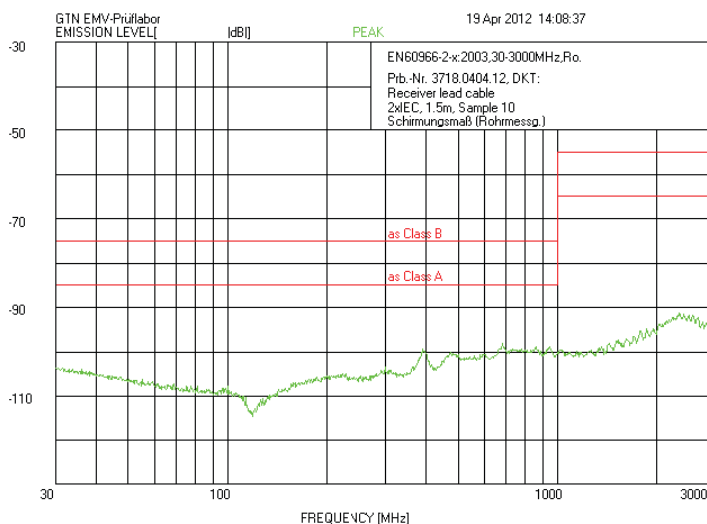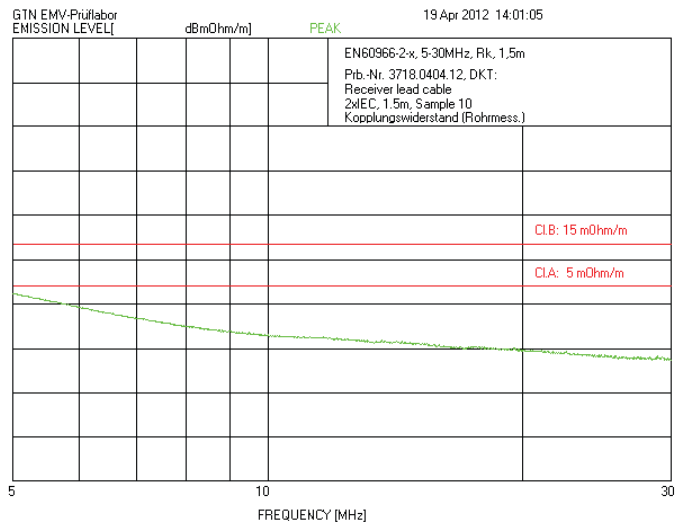

### Screening attenuation & Transfer impedance

The curves are measurements for screening attenuation and transfer impedance on the connection cable.