


# Loose Tube Fibre Optic Outdoor Cable

12 Element All Dielectric Dry Core Design

**MiDia<sup>®200</sup> Micro GX / K1-3478**



Issue March 2019  
according to **Customised OFS Generic Specification**

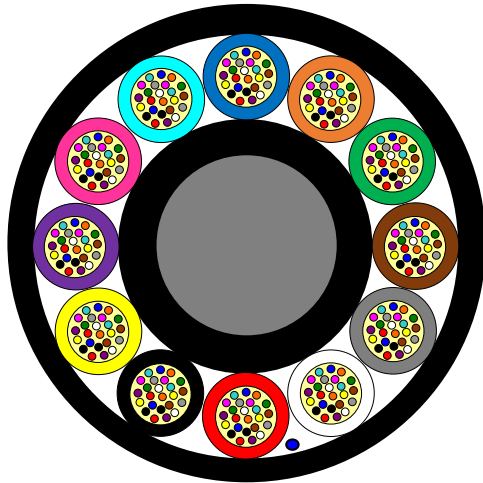

## Application

Air-Blown Installation into Micro Ducts

## Design

- Optical Fibres
- Gel Filled Buffer Tubes
- Dielectric Central Member
- Ripcord
- PE Sheath

## Features

- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 288 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	AT-Code*
<b>24 Singlemode Fibres per Tube</b>					
288	12	1+12	8.0	60	AT-8EE453F-288

This table shows nominal diameter and weight values which may differ in shipments.

\*Please refer to the OFS AT-Code.

## Identification

### Tube Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

### Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua
13	Blue*	14	Orange*	15	Green*	16	Brown*	17	Grey*	18	White*
19	Red*	20	Natural	21	Yellow*	22	Violet*	23	Rose*	24	Aqua*

\* Black ring

## Sheath Marking

OFS OPTICAL CABLE MIDIA200 MICRO GX [ID] [MM/YYYY] [Handset Sign] 288F [Meter Marking]

# Loose Tube Fibre Optic Outdoor Cable

## 12 Element All Dielectric Dry Core Design

### MiDia<sup>®200</sup> Micro GX / K1-3478



Issue March 2019  
according to **Customised OFS Generic Specification**

#### Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
<b>Tensile Performance:</b>  IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 1000 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.5%	Load: 2800 N
<b>Crush Performance:</b>  IEC 60794-1-21-E3A	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 700 N
<b>Bending Performance of Cable:</b>  IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 80 mm
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 160 mm
<b>Temperatures:</b> IEC 60794-1-22-F1 IEC 60794-5-10	Operation	- No attenuation increase***	-30 to +70°C
	Installation		-15 to +40°C
	Storage/Shipping		-40 to +70°C

\*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

\*\* Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

\*\*\* No changes in attenuation either positive or negative higher than 0.15 dB/km in the 1550 nm range according to the Microcable Standard IEC 60794-5-10:2014

#### Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)	
	Diameter(battened)	Width	Without lagging	With lagging
2000 m	1050 mm	790 mm	190 kg	210 kg
4000 m	1050 mm	790 mm	320 kg	340 kg
6000 m	1250 mm	790 mm	470 kg	510 kg
8000 m	1450 mm	790 mm	630 kg	670 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS reserves the right to improve, enhance and modify the features and specifications of OFS products without prior notification. Please ensure you have the latest version of the datasheet.

This data sheet is property of OFS.

For additional information please contact your sales representative.

You can also visit our website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: [cableinfo@ofsoptics.com](mailto:cableinfo@ofsoptics.com)

MiDia is a registered trademark of Fitel USA Corp.

