


Loose Tube Fibre Optic Outdoor Cable

8 Element All Dielectric Design

MiDia® 2FX Dry Core Cable



Issue January 2013
according to **OFS Generic Specification**

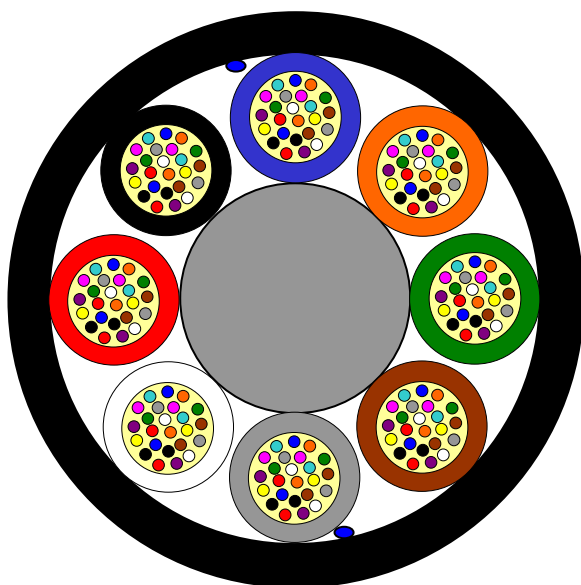

Application

Air-Blown Installation into Micro-Ducts

Design

- Optical Fibres (200µm AllWave® FLEX)
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Ripcord
- PE-Jacket

Features

- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 192 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	Standard Length [m]	AT-Code**
24 Fibres per Tube						
192	8	1+8	7.6	55	2000 / 4000 / 6000 / 8000	AT-[][][46CF-192

This table shows nominal diameter and weight values which may differ in shipments.

*Fillers are natural coloured **Please refer to the OFS AT- Code. The blanks specify the fibre type.

Identification

Tube Colour Code:

1	Blue	2	Orange	3	Green	4	Brown
5	Grey	6	White	7	Red	8	Black

Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua
13	Blue*	14	Orange*	15	Green*	16	Brown*	17	Grey*	18	White*
19	Red*	20	Nature	21	Yellow*	22	Violet*	23	Rose*	24	Aqua*

* Black ring

Alternative tube and fibre colour code available on request

Sheath Marking

OFS OPTICAL CABLE [ID] [MM/YYYY] [Handset Sign] 192F [Meter Marking]

Alternative sheath printing available on request.

Loose Tube Fibre Optic Outdoor Cable

8 Element All Dielectric Design

MiDia[®] 2FX Dry Core Cable



Issue January 2013
according to **OFS Generic Specification**

Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
Tensile Performance: IEC 60794-1-2-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 200 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.33%	Load: 2 x W <i>W is the weight of the cable in N</i>
Crush Performance: IEC 60794-1-2-E3	Long term load	- No attenuation increase*	Load (Plate / Plate): 250 N
	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 1000 N
Bending Performance: IEC 60794-1-2-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 150 mm
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 300 mm
Temperatures: IEC 60794-1-2-F1	Operation	- No attenuation increase*	-30 to +70°C
	Installation		-15 to +60°C
	Storage/Shipping		-40 to +70°C

* No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

** Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)	
	Diameter	Width	Without lagging	With lagging
2000 m	1050 mm	790 mm	170 kg	190 kg
4000 m	1050 mm	790 mm	280 kg	300 kg
6000 m	1250 mm	790 mm	410 kg	450 kg
6000 m	1450 mm	790 mm	550 kg	590 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS reserves the right to improve, enhance and modify the features and specifications of OFS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS.

For additional information please contact your sales representative.

You can also visit our

website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: cableinfo@ofsoptics.com

MiDia is a registered trademark of Fitel USA Corp.