

Technical datasheet for:


SKW / sleeve sanded



General data					
Discription	The sanded sleeves are used for being plastered in brick walls. The fittings are protected against contamination when being plastered.				
Transport and storage temperature	-40 to +65	°C			
Laying or installation temperature	+5 to +40	°C			
Operating temperature	-10 to +50	°C			

Technical data			
Quality	Value		
Material	PolyVinylChlorid - Unplastinized PVC-U		

SKW						
Dimension (mm)	Inner-Ø (mm)	Length (mm)	Package unit (Piece)	sanded	Usage	
Ø32	Ø28	390	2	completely covered	ADSB 28/7 Set, ADSB-F 28/7 Set, ADSB-F 28/10 Set	
Ø32	Ø28	500	2	completely covered	ADSB 28/7 Set, ADSB-F 28/7 Set, ADSB-F 28/10 Set	
Ø50	Ø47	390	2 resp. 8	completely covered	ADSB 7.0-9.0 Set, ADSB 9.0-12.5 Set, ADSB-D 7.0-9.0 Set, ADSB-D 9.0-12.5 Set	
Ø50	Ø47	500	2	completely covered	ADSB 7.0-9.0 Set, ADSB 9.0-12.5 Set, ADSB-D 7.0-9.0 Set, ADSB-D 9.0-12.5 Set	

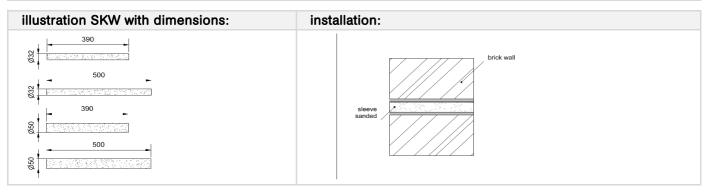

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.




Technical datasheet for:

SKW / sleeve sanded



sleeves sanded						
Dimension (mm)	Inner-Ø (mm)	Length (mm)	Package unit (Piece)	sanded (mm)	Usage	
Ø32	Ø28	1200	1	420	ADSB 28/7 Set, ADSB-F 28/7 Set, ADSB-F 28/10 Set, EZA-t 32	
Ø50	Ø47	600	10	240 (central)	ADSB 7.0-9.0 Set, ADSB 9.0-12.5 Set, ADSB-D 7.0-9.0 Set, ADSB-D 9.0-12.5 Set, EZA-t 50	
Ø50	Ø47	1200	1	420	ADSB 7.0-9.0 Set, ADSB 9.0-12.5 Set, ADSB-D 7.0-9.0 Set, ADSB-D 9.0-12.5 Set, EZA-t 50	

illustration sleeves with dimensions: 1200 100 420 240 1200 1200 1200

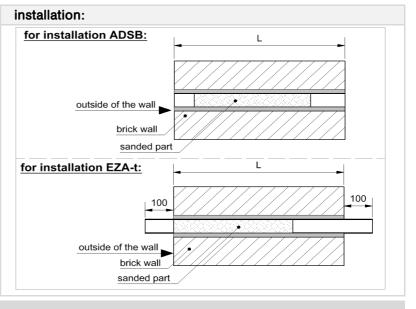

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN 50001.

The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH Am Schaidweg 7 94559 Niederwinkling

GERMANY

Tel. +49 9962 950-200 Fax +49 9962 950-202 info@gabocom.com Editor: CBR Variant

Date: 13.07.2023

www.gabocom.com Edition: 6