


Technical datasheet for:

SHa and DSHa

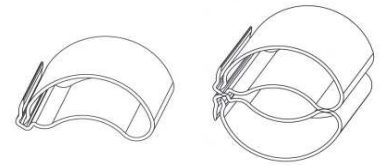

General data

Item	Outside (double) stiffener
Description	The divided outside (double) stiffener (D)SHa is used for the outside stiffening of the jacket pipe of (two) one speedpipe-bundle SRV 50 / 8x10 before installing the sealing element ADE/TDUX (90) 100 (Tyco).
Package unit	12 Pcs.

Technical data

Quality	Value	Unit
Material	PolyPhenylenOxid PPO	
Dimension	SHa 50:	L = 149; b = 76,5
	DSHa 50:	L = 148,3; b = 74,6
		mm

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN 50001.

The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH
 Am Schaidweg 7
 94559 Niederwinkling
 GERMANY

Tel. +49 9962 950-200
 Fax +49 9962 950-202
 info@gabocom.com
 www.gabocom.com

Editor: LF
 Release: MK
 Date: 03.12.2015
 Edition: 2

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.