


Loose Tube Fibre Optic Outdoor Cable

5 Element Dry Core Design

Standard Light Armour Cable



Issue March 2014
according to **OFS Generic Specification**

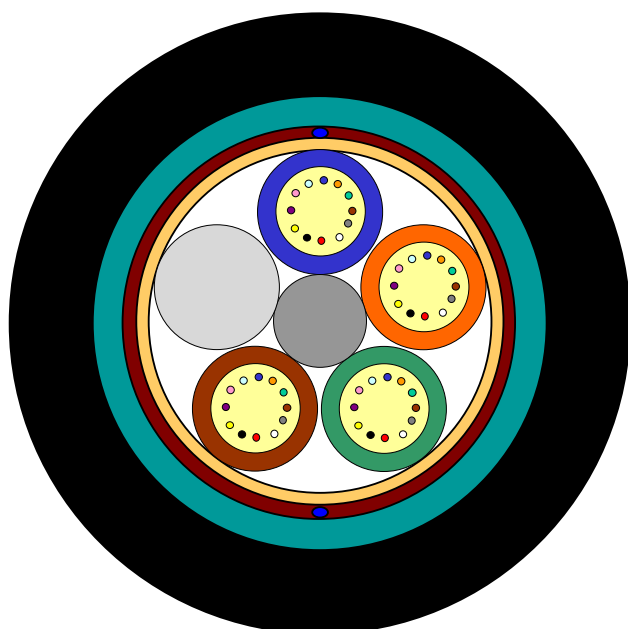

Application

Mainly used for direct burial and for Duct-Installation (HD-PE Tubes) by Cable Pulling

Design

- Optical Fibres
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Water Blocking Material
- Non-metallic Strength Elements
- Corrugated Steel Tape
- Ripcords
- PE-Jacket

Features

- Light Armour Cable – ideal rodent protection
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 48 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	Standard Length [m]	AT-Code**
12	2 (6F)	1+5 (3 Filler*)	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2U6-012
24	4 (6F)	1+5 (1 Filler*)	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2U6-024
12	1 (12F)	1+5 (4 Filler*)	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2UT-012
24	2 (12F)	1+5 (3 Filler*)	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2UT-024
48	4 (12F)	1+5 (1 Filler*)	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2UT-048
60	5 (12F)	1+5	12.2	145	2000 / 4000 / 6000 / 8000	AT-[][][]H2UT-060

This table shows nominal diameter and weight values which may differ in shipments.

*Fillers are natural coloured **Please refer to the OFS AT- Code. The blanks specify the fibre type.

Identification

Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

Alternative tube and fibre colour code available on request

Sheath Marking

OFS OPTICAL CABLE [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]

Alternative sheath printing available on request.

In case of order the exact sheath printing text will be clarified with the customer.

Loose Tube Fibre Optic Outdoor Cable

5 Element Dry Core Design

Standard Light Armour Cable



Issue March 2014
according to **OFS Generic Specification**

Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
Tensile Performance: IEC 60794-1-2-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 1000 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.33%	Load: 2700 N
Crush Performance: IEC 60794-1-2-E3	Long term load	- No attenuation increase*	Load (Plate / Plate): 500 N
	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 3000 N
Bending Performance: IEC 60794-1-2-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 15 x D
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 20 x D <i>D is cable diameter</i>
Temperatures: IEC 60794-1-2-F1	Operation	- No attenuation increase*	-40 to +70°C
	Installation		-15 to +60°C
	Storage/Shipping		-40 to +70°C

*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than of equal to 0.05 dB.

**Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)	
	Diameter(battened)	Width	Without lagging	With lagging
2000 m	1250 mm	790 mm	370 kg	410 kg
4000 m	1450 mm	790 mm	690 kg	730 kg
6000 m	1600 mm	1055 mm	1000 kg	1060 kg
8000 m	1750 mm	1055 mm	1310 kg	1370 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS reserves the right to improve, enhance and modify the features and specifications of OFS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS.

For additional information please contact your sales representative.

You can also visit our
website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: cableinfo@ofsoptics.com

