




European Cabling Systems

MPO MicroCable Fan-Out Assembly

MPO Fan-Out Assemblies interface multifiber MPO with single fiber LC connectors.

ART. NR	BESKRIVNING
MPOF-12LCOM4-01/FK	ECS Fanout 1xMPO-6xLCD 50/125 OM4 Type B korsad 1,0m
MPOF-12LCOM4-02/FK	ECS Fanout 1xMPO-6xLCD 50/125 OM4 Type B korsad 2,0m
MPOF-12LCOM4-03/FK	ECS Fanout 1xMPO-6xLCD 50/125 OM4 Type B korsad 3,0m
MPOF-12LCOM4-05/FK	ECS Fanout 1xMPO-6xLCD 50/125 OM4 Type B korsad 5,0m
MPOF-12LCOM4-07/FK	ECS Fanout 1xMPO-6xLCD 50/125 OM4 Type B korsad 7,0m

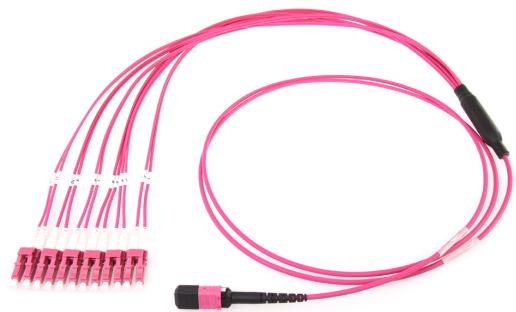

Description

MPO Fan-Out Assemblies interface multifiber MPO with discrete single fiber LC connectors. Assemblies are typically used to directly interconnect MPO cassettes, panels or backbone trunk assemblies with the active equipment ports, saving costly data center rack space and easing fiber management. Replacing traditional MPO module Fan-Out Assemblies reduce amount of interconnection improving power budget cost effectiveness.

LSZH cable jacket type

Standard jacket colors: OM4 Erika Violet

Factory terminated and tested

Optimized performance - Low loss Premium MPO and discrete LC Premium connectors and OM4 fiber assures low insertion losses and power penalties in tight power budget high speed network environment

Rapid deployment Factory terminated modular system saves installation and reconfiguration time during moves, adds and changes

Reliability 100% tested - combination of high quality components and manufacturing quality control guarantees product to the highest standards

Specifications


Installation Temperature	-5 ~ +50°C
Operation Temperature	-20 ~ +60°C

MPO Premium (MM)	IL Average: 0.10 dB	IL Max: 0.35 dB
LC Premium (MM)	IL Average: 0.08* dB	IL Max: 0.15* dB

* Tested as per IEC 61300-3-4

Polarity

Type B:

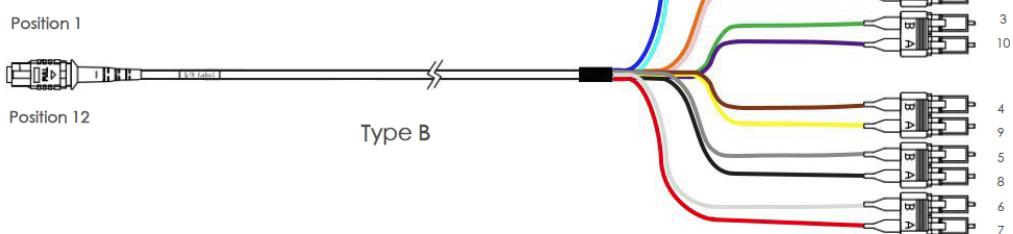

Med reservation för tryckfel och förändringar i teknisk prestanda. Produktblad: MPOF-12LCOMVer01