



unit : mm

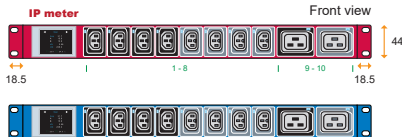

32A model	H8L13/2L19-32A-ZSiCR_EN/3B-3	16A MCB x 2	3M Cordset 3W 4.0mm sq. H05V V-F	IEC 60309 Inlet 2P+E 32A
7.4 kVA				
32A model	H8L13/2L19-32A-ZSiCR_EN/4B-3	16A MCB x 2	4M Cordset 3W 4.0mm sq. H05V V-F	IEC 60309 Inlet 2P+E 32A
7.4 kVA				

Circuit A : C13 combo # 1 - 4 + C19 # 9
 Circuit B : C13 combo # 5 - 8 + C19 # 10
 Circuit max. Amp. : 16A

Slide Lock Outlet

Worldwide Patented

C13/C15

C19

Black

Grey



REACH



Specification

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity (non-condensing) : 8 to 95% RH
 Chassis Material / Color : Steel / Red & Blue
 Product Dimension : 442W x 300D x 44H (mm)
 Packing Dimension : 525W x 410D x 80H (mm)
 Net / Gross Weight : 6.3 / 6.9 kg



Meter Features

Local Display : Field replaceable 2.0" color LCD with touchscreen
 Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
 Outlet Measurement : Current (A), Energy (kWh)
 Outlet Control : Outlet Switch ON / OFF
 Accuracy : ±0.5% Billing-grade
 IP Access : Embedded Gigabit LAN IP
 Enterprise IP Authentication, LDAPv3 / LDAPS
 Active Directory®, RADIUS, 802.1x
 Protocol : SNMP V2 V3, Web GUI, Modbus/TCP, RestAPI, LUA
 Cascade : Up to 32 PDU under single IP address
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor / Door Sensor

Safety Certificates

CB : IEC 62368-1:2018
 CE/ LVD : EN IEC 62368-1:2020
 EN IEC 62368-1:2020/A11:2020
 UKCA : BS EN IEC 62368-1:2020,
 BS EN IEC 62368-1:2020+A11:2020

EMC Certificates

CE / EMC : EN 55032:2015+A1:2020
 EN 55035:2017+A11:2020
 EN IEC 61000-3-2:2019+A1:2021+A2:2021
 EN61000-3-3:2013+A1:2019+A2:2021

Environment : RoHS, Reach & WEEE