


unit : mm

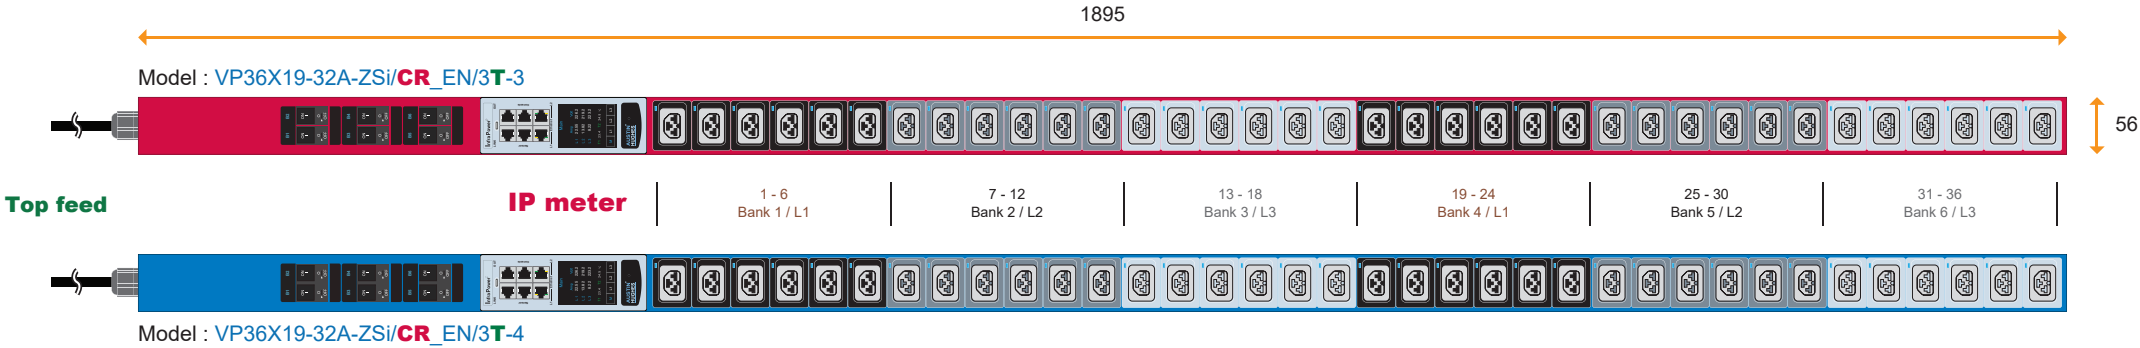

32A model 22.2 kVA	VP36X19-32A-ZSi/CR_EN/3T-3 VP36X19-32A-ZSi/CR_EN/3T-4	16A MCB x 6	3M Cordset 5W 4.0mm sq. H05V V-F	IEC 60309 Inlet 3P+N+E 6hr 32A
-----------------------	--	-------------	--	--------------------------------------

- L1 Bank 1 : Combo 4-in-1 # # 1 - 6
Bank 4 : Combo 4-in-1 # # 19 - 24
- L2 Bank 2 : Combo 4-in-1 # # 7 - 12
Bank 5 : Combo 4-in-1 # # 25 - 30
- L3 Bank 3 : Combo 4-in-1 # # 13 - 18
Bank 6 : Combo 4-in-1 # # 31 - 36

Slide Lock Outlet
Worldwide Patented


C13/C15/C19/C21

Black Grey White

Bank max. Amp. : 16A



Specification		
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity (non-condensing)	:	8 to 95% RH
Chassis Material / Color	:	Steel / Red & Blue
Product Dimension	:	56W x 68D x 1895H (mm)
Packing Dimension (2-in-1)	:	110W x 268D x 2168H (mm)
Net / Gross Weight	:	11.48 kg / 12.88 kg



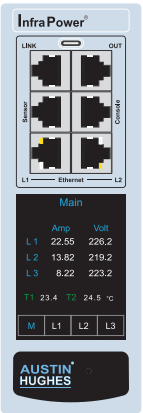


Meter Features	
Local Display	: Field replaceable 2.8" color LCD with touchscreen
Bank Measurement	: Current (A), Energy (kWh), Voltage (V) & Power factor
Outlet Measurement	: Current (A), Energy (kWh)
Outlet Control	: Outlet Switch ON / OFF
Accuracy	: ±0.5% Billing-grade
IP Access	: Embedded Dual Gigabit LAN IP Dual LAN Network Failover Enterprise IP Authentication, LDAPv3 / LDAPs Active Directory®, RADIUS, 802.1x
Protocol	: SNMP V2 V3, Web GUI, Modbus/TCP, RestAPI, LUA
Cascade	: Up to 32 PDU under single IP address
Console port x 1	: PDU configuration
USB-C port x 1	: Wi-Fi connection, firmware update, backup power for meter
Sensor Port x 1	: Temp. Sensor / Temp. + Humid. Sensor / Door Sensor (support daisy chain sensors up to 4)

Safety Certificates	
CB	: IEC 62368-1:2018
CE/ LVD	: EN IEC 62368-1:2020 EN IEC 62368-1:2020/A11:2020
UKCA	: BS EN IEC 62368-1:2020, BS EN IEC 62368-1:2020+A11:2020
EMC Certificates	
CE / EMC	: EN 55032:2015+A1:2020 EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019+A1:2021+A2:2024 EN61000-3-3:2013+A1:2019+A2:2021
Environment : RoHS, Reach & WEEE	

Mounting kit & Diagram

VMS Mounting Button

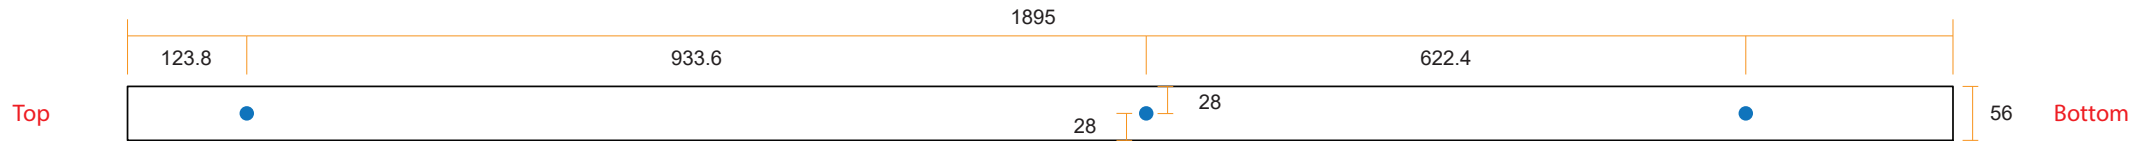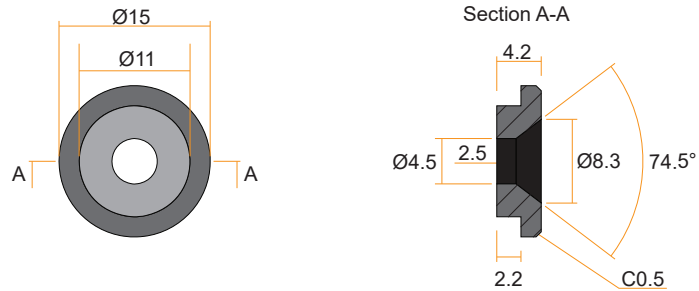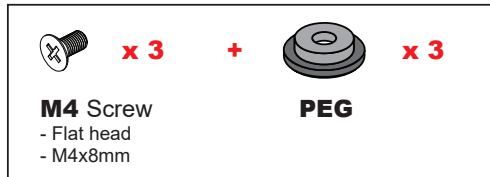

Unit : mm
1 inch = 25.4 mm

VMB Mounting Bracket

