


Divisible Duct Seal

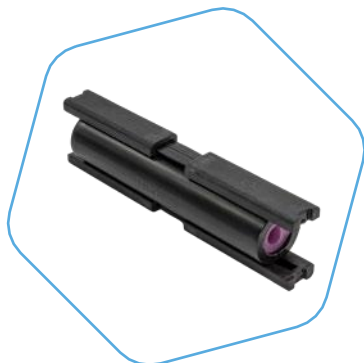

DESCRIPTION

Used to seal a MicroDuct following a mid-span cable installation, or to repair a damaged section of a MicroDuct, with or without pre-installed fibres.

APPLICATION

For use with MicroDucts in direct-buried or sub-duct installations.

KEY TECHNICAL PARAMETERS

Material

Body:	Polyamide (PA) glass fibre reinforced
Seal:	Silicone

Temperature

Operation:	-20 °C to +60 °C
Installation:	-15 °C to +45 °C
Transport and storage:	-20 °C to +60 °C

Standards

Lifetime:	1,000-hour ageing at 95 °C
-----------	----------------------------

Pressure

Burst:	10 bars for 30minutes
Working:	0,5 bars (gas block version)

Others

UV Resistant:	No
Operational lifetime:	25+ years

TECHNICAL DATA SHEET: ACCESSORIES

PRODUCT VARIATIONS

Name	Length (mm)	Width (mm)	Pull out force (N)	Packaging (pcs)	SAP code
Divisible Duct Seal 5 mm	145	42	100	10	20040126
Divisible Duct Seal 7 mm	145	42	125	10	20030085
Divisible Duct Seal 8 mm	145	42	160	10	20030086
Divisible Duct Seal 10 mm	145	42	200	10	20030087
Divisible Duct Seal 12 mm	145	42	250	10	20030088
Divisible Duct Seal 14 mm	145	42	350	10	20030089
Divisible Duct Seal 16 mm	145	42	500	10	20030090
Divisible Duct Seal 18 mm	145	49	500	10	20040127
Divisible Duct Seal 20 mm	145	49	500	10	20030091
Divisible Gasblock Duct Seal 5 mm	145	42	100	10	20073155
Divisible Gasblock Duct Seal 7 mm	145	42	125	10	20073156
Divisible Gasblock Duct Seal 8 mm	145	42	160	10	20073157
Divisible Gasblock Duct Seal 10 mm	145	42	200	10	20073158
Divisible Gasblock Duct Seal 12 mm	145	42	250	10	20073159
Divisible Gasblock Duct Seal 14 mm	145	42	350	10	20073160
Divisible Gasblock Duct Seal 16 mm	145	42	500	10	20073161
Divisible Gasblock Duct Seal 18 mm	145	49	500	10	20073162
Divisible Gasblock Duct Seal 20 mm	145	49	500	10	20073163