


## MICROBUNDLES

# FuturePath ECO 4x16/12 mm

A bundle of MicroDucts which use up to 100% reground High-Density Polyethylene (HDPE) from Dura-Line's own internal manufacturing process. FuturePath® ECO contributes to lower scope 3 emissions for network operators and is suitable for direct-buried or sub-duct installation in outdoor optical communications networks. All standard MicroDuct sizes and bundle combinations are available, and all products meet stipulated parameters for regular MicroDuct products.

- Made from up to 100%, high-quality, reground HDPE
- Sheath and coloured identification stripes may use regular or reground materials
- Available in configurations starting from 2 MicroDucts, with sizes ranging from 7 mm to 20 mm Outer Diameter (OD)
- Sheath is easy to remove for quick access to individual pathways
- Suitable for underground installation via common duct deployment methods (trench, MicroTrench, pull, directional drill, plough)
- Branching is simple with a DuraFit connector
- SILICORE®, permanently lubricated, coextruded, regular HDPE-based inner lining provides a lower inner coefficient of friction (<0.1) for maximum cable blowing length
- UV resistance up to 2 years in Central European climatic conditions, depending on customer specified requirements

## COLORS

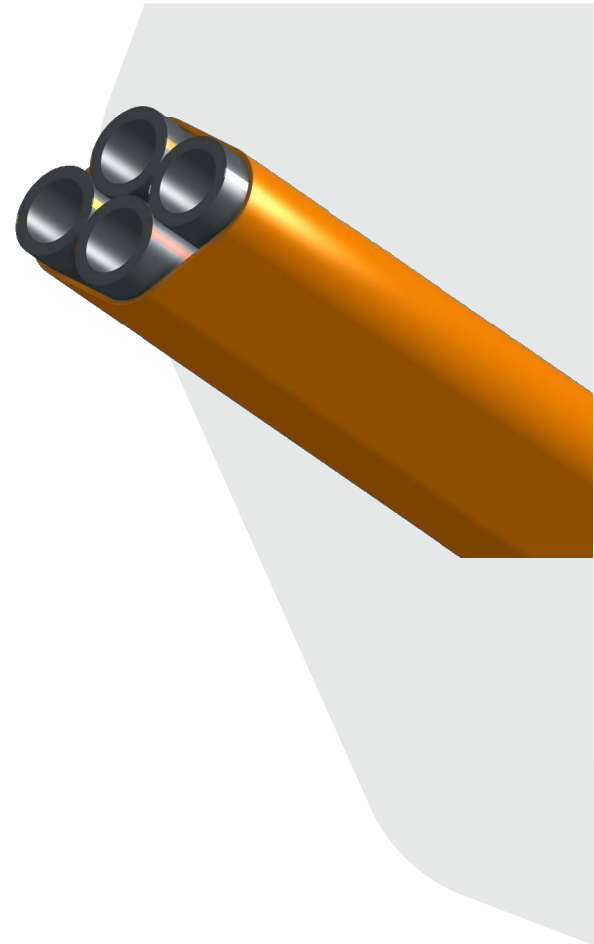

## DETAILS

- Footage/Meter Markings
- Direct Install (DI)
- Direct Buried (DB)

## OPTIONS

- Meter Marking
- Ribbed InnerWall
- Silicore®
- Color Stripes

## TECHNICAL SPECIFICATIONS

PRODUCT DESCRIPTION	FuturePath ECO 4x16/12 mm
---------------------	---------------------------

### PHYSICAL PROPERTIES

Bend Radius	405 mm
Height (A)	33.5 mm
Oversheath (B)	0.75 mm
Width (C)	40.5 mm
MicroDuct Size (OD/ID)	16/12 mm

### GENERAL PRODUCT INFORMATION

Storage Temperature	-40 to 70 °C
Installation Temperature	-20 to 50 °C
Use Temperature	-40 to 70 °C
Transport Temperature	-40 to 70 °C
UV Stability (Years in Central European climatic conditions)	up to 2 years

### PERFORMANCE PROPERTIES

Maximum Pulling Force - Test Method: ISO 527-1, 2	4740 N
Resistance of Marking	IEC 60794-1-2, Method E2B nr 2

### PACKAGING

Nominal Weight of Conduit	416 kg/km
Length on Drum	1000 m
Drum Dimensions	190x90x100 cm
Print Marking	0000 m - Dura-Line - <batch number> - FuturePath ECO - 4x16/12 - <YYYY/MM/DD>

