

CS44Z3 ETL Verified Category 6A U/UTP LSZH Cable, white jacket, 4 pair count, 1000 ft (305 m) length, CommPak


## Product Classification

<b>Portfolio</b>	NETCONNECT®
<b>Product Type</b>	Twisted pair cable
<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America

## Standards And Qualifications

<b>EN50575 CPR Cable EuroClass</b>	Dca   s2   d2   a1
------------------------------------	--------------------

## Cross Section Drawing

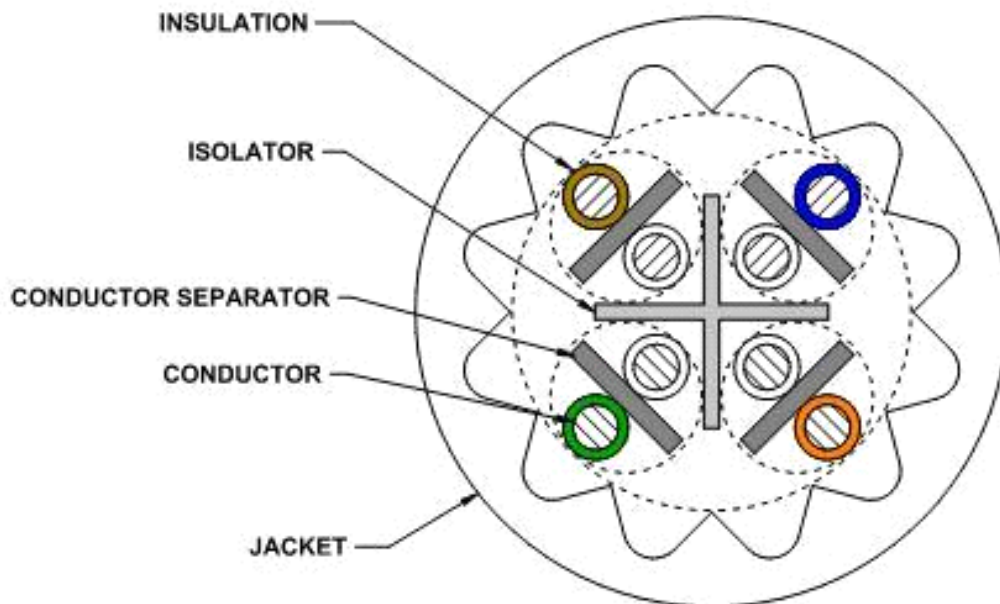

## Construction Materials

<b>Jacket Material</b>	Low Smoke Zero Halogen (LSZH)
<b>Conductor Material</b>	Bare copper
<b>Insulation Material</b>	Polyolefin
<b>Separator Material</b>	Polyolefin
<b>Separator 2 Material</b>	Polyolefin

## Dimensions

<b>Cable Length</b>	305 m   1000 ft
<b>Cable Weight</b>	36.90 lb/kft
<b>Diameter Over Jacket, nominal</b>	7.239 mm   0.285 in
<b>Jacket Thickness</b>	1.295 mm   0.051 in

## Electrical Specifications

<b>ANSI/TIA Category</b>	6A
<b>dc Resistance Unbalance, maximum</b>	4 %
<b>dc Resistance, maximum</b>	7.61 ohms/100 m
<b>Mutual Capacitance</b>	6.0 nF/100 m @ 1 kHz
<b>Nominal Velocity of Propagation (NVP)</b>	66 %
<b>Operating Frequency, maximum</b>	550 MHz
<b>Operating Voltage, maximum</b>	80 V
<b>Transmission Standards</b>	ANSI/TIA-568-C.2   ISO/IEC 11801 Class EA
<b>Safety Voltage Rating</b>	300 V

## Environmental Specifications

<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Smoke Test Method</b>	IEC 61034-2
<b>Acid Gas Test Method</b>	IEC 60754-2
<b>Flame Test Method</b>	IEC 60332-3-22
<b>Installation Temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)

## General Specifications

<b>Cable Type</b>	U/UTP (unshielded)
<b>Packaging Type</b>	CommPak® box
<b>Pairs, quantity</b>	4
<b>Cable Component Type</b>	Horizontal
<b>Jacket Color</b>	White
<b>Product Number</b>	CS44Z3
<b>Conductor Gauge, singles</b>	23 AWG
<b>Conductor Type, singles</b>	Solid
<b>Conductors, quantity</b>	8
<b>Separator Type</b>	Isolator

## Mechanical Specifications

**Pulling Tension, maximum** 11 kg | 25 lb

## Regulatory Compliance/Certifications

### Agency

RoHS 2011/65/EU  
ISO 9001:2015  
CENELEC

### Classification

Compliant  
Designed, manufactured and/or distributed under this quality management system  
EN 50575 compliant, Declaration of Performance (DoP) available



## Electrical Performance

Std Refers to the standard value listed under Transmission Standards in the Electrical Specifications above

Typ Typical

IL Insertion Loss (dB/100m)

NEXT Near End Crosstalk (dB/100m)

ACR Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT Power Sum Near End Crosstalk (db/100m)

PSACR Power Sum Attenuation to Crosstalk Ratio (dB/100m)

ACRF Attenuation to Crosstalk Ratio - Far End (dB/100m)

PSACRF Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)

RL Return Loss (dB)

Freq. MHz	IL		NEXT		ACR		PSNEXT		PSACR		ACRF		PSACRF		RL	
	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ
1	2.1	1.8	74.3	90.6	72.2	88.8	72.3	88.3	70.2	86.5	67.8	82.1	64.8	80.3	20.0	32.2
4	3.8	3.6	65.3	82.4	61.5	78.8	63.3	80.2	59.5	76.6	55.8	70.1	52.8	68.4	23.0	33.9
8	5.3	5.1	60.8	77.6	55.4	72.5	58.8	75.8	53.4	70.7	49.7	64.1	46.7	62.3	24.5	36.7
10	5.9	5.7	59.3	76.4	53.4	70.7	57.3	74.4	51.4	68.7	47.8	62.2	44.8	60.4	25.0	37.7
16	7.5	7.3	56.2	73.1	48.8	65.9	54.2	71.3	46.8	64.0	43.7	58.2	40.7	56.4	25.0	38.7
20	8.4	8.1	54.8	71.5	46.4	63.4	52.8	69.7	44.4	61.6	41.8	56.4	38.8	54.5	25.0	38.7
25	9.4	9.1	53.3	70.2	44.0	61.1	51.3	68.3	42.0	59.2	39.8	54.5	36.8	52.6	24.3	35.5
31.25	10.5	10.2	51.9	68.6	41.4	58.4	49.9	66.7	39.4	56.5	37.9	52.7	34.9	50.7	23.6	37.2
62.5	15.0	14.6	47.4	64.2	32.4	49.6	45.4	62.3	30.4	47.7	31.9	46.6	28.9	44.7	21.5	34.6
100	19.1	18.6	44.3	60.8	25.2	42.1	42.3	59.0	23.2	40.3	27.8	42.5	24.8	40.5	20.1	30.3
155	24.1	23.4	41.4	58.4	17.4	35.0	39.4	56.4	15.4	33.0	24.0	38.9	21.0	37.0	18.8	30.8
200	27.6	26.8	39.8	56.0	12.2	29.2	37.8	54.2	10.2	27.4	21.8	36.6	18.8	34.6	18.0	30.0
250	31.1	30.1	38.3	54.3	7.3	24.2	36.3	52.5	5.3	22.3	19.8	34.6	16.8	32.6	17.3	30.5
300	34.3	33.1	37.1	53.1	2.9	19.9	35.1	51.2	0.9	18.1	18.3	33.1	15.3	31.2	16.8	31.1
350	37.2	36.0	36.1	51.8	-1.1	15.8	34.1	49.9	-3.1	13.9	16.9	31.9	13.9	29.9	16.3	31.7
400	40.1	38.8	35.3	50.8	-4.8	12.0	33.3	48.8	-6.8	10.0	15.8	30.6	12.8	28.6	15.9	31.5
500	45.3	43.6	33.8	47.9	-11.4	4.3	31.8	45.8	-13.4	2.2	13.8	28.7	10.8	26.7	15.2	32.0
550		43.8		48.0		4.1		45.9		2.0		28.6		26.7		31.9
650		50.2		43.5		-6.7		41.5		-8.8		25.7		23.5		25.3