

Divisible duct seals 10mm

FILOform



Filoform divisible duct sealing sets for subducts have been developed to provide an effective and simple solution to all Gas and Watertight duct sealing requirements.

This modular system enables you to install it easily onto new and existing installations. Due to the compact design the seals can be installed in all situations, even in locations with difficult access.

For use on subducts of 10mm.


PATENTED

Features

- Gas and Watertight up to 0,5 bar.
- Suitable for retrofitting.
- Easy installation.
- Slim design.
- Other versions available upon request.

Divisible duct seals 10mm

Specifications

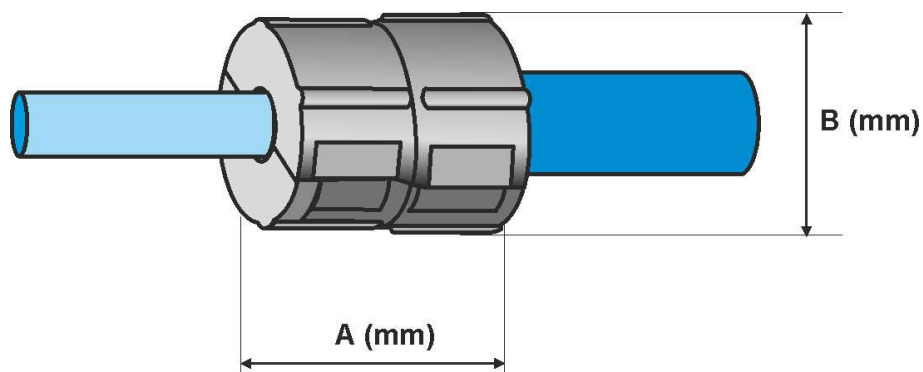

Dimensions	A (mm)	B (mm)	Weight (gr.)
Duct seal 10mm	30	24	12

Material specification

Properties	Value
Plastic scales	glassfibre reinforced
Cutting block	glassfibre reinforced
Sealing plug	silicone
Sealing	up to 0,5 bar
Pull-out force duct seal vs duct	≥ 100N
Mechanical compression strength	≥ 1000N, 10 sec.

Divisible duct seals 10mm


FILOform

More info

Contents

- 2 pieces of plastic shells with click together fixings
- 1 piece cutting block
- 1 rubber seal
- Illustrated installation instructions

Deelbare glasvezel afdichting
Divisible fibre optic seals
Teilbar LWL-dichtungen
Fibre optique divisible sceaux
Sellos de fibra optica

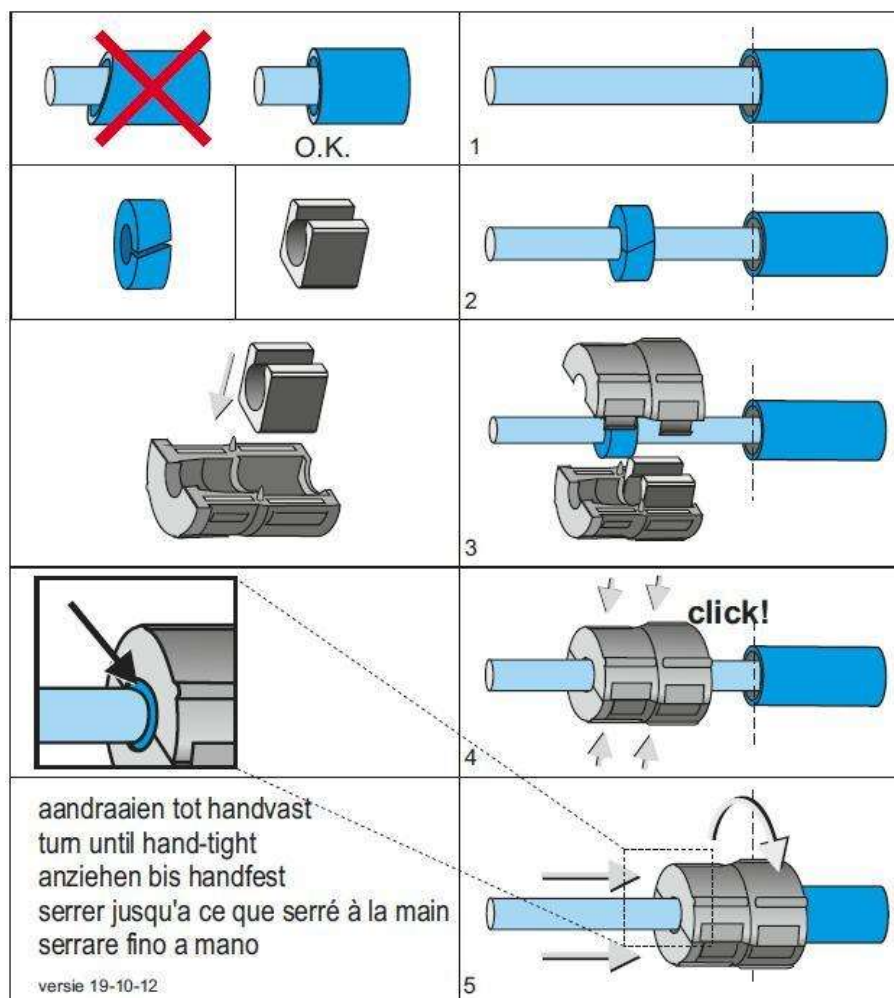

Divisible duct seals 10mm



Products

Product Name	Colour	Duct outside diameter (mm)	Cable Diameter (mm)
Duct seal 10mm / 2,5-1,5mm	purple	10	2,5-1,5
Duct seal 10mm / 3,5-2,5mm	light blue	10	3,5-2,5
Duct seal 10mm / 5,0-3,5mm	green	10	5,0-3,5
Duct seal 10mm / 6,5-5,0mm	red	10	6,5-5,0
Duct seal 10mm / 7,5-6,5mm	dark blue	10	7,5-6,5