


MICROBUNDLES

DuraMulti HDPE 4x7/3,5 mm


DuraMulti is an easy to handle unit of DuraMicro bundled under a polyethylene overshooth. The easily removable overshooth makes it simple to access individual DuraMicro pathways for uncomplicated branching. Utilizing common duct placing installation techniques, the unique shape makes installation easy for direct buried (DB) installations. DuraMulti comes standard with an orange overshooth and individual colored DuraMicro DB for easy identification.

- Made from High Density Polyethylene (HDPE)
- Pressure resistance minimum 15 bar
- Available in configurations with 2 to 24 DuraMicro pathways, with sizes ranging from 7 mm - 20 mm OD
- Multiple DuraMicro bundled under sheath for one-step placement of multiple pathways
- Anti-static inner layer reduces friction caused by static electricity build-up during fibre installation
- Silicore, permanently lubricated inner lining provides a lower inner coefficient of friction (<0.1) for maximum cable blowing length
- DuraMulti can withstand impacts and standard pulling strength requirements typical for Direct Buried (DB) installations
- Easy to remove outer sheath provides access to individual pathways
- User-friendly deployment of multiple MicroDucts
- Branching is simple with a DuraFit connector
- Optional detection wire is available upon request

COLOR OPTIONS (COLORS MAY VARY) :

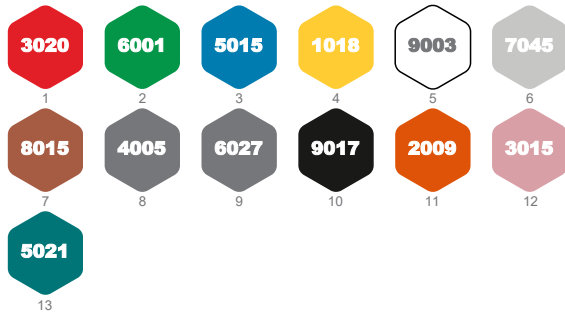

RAL color codes shown. Other colour and stripe options available. Please note, for certain color options actual color may vary from RAL color code due to material variations.

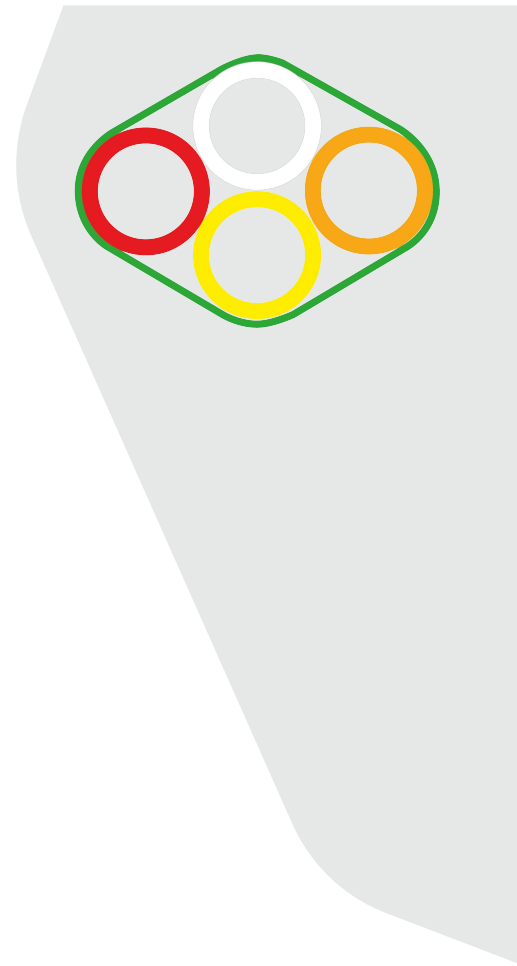

DETAILS

- Footage/Meter Markings
- Internal Ribs
- Direct Buried (DB)

OPTIONS

- Silicore®
- Rip Cord
- Locate Wire

TECHNICAL SPECIFICATIONS

Product Description	DuraMulti HDPE 4x7/3,5 mm
---------------------	---------------------------

PHYSICAL PROPERTIES

Avg OD	16.95 mm
Bend Radius	184 mm
Height	18.4 mm
Web Thickness	0.75 mm
Width	15.5 mm
MicroDuct Size (OD/ID)	7/3.5 mm

GENERAL PRODUCT INFORMATION

Storage Temperature	-40 to 70°C
Installation Temperature	-20 to 50°C
Use Temperature	-40 to 70°C
Interior wall	Smooth, Ribbed
Pre-Lubrication Class	Silicore
UV Stability	up to 2 years

PERFORMANCE PROPERTIES

Maximum Pulling Force	1560 N
-----------------------	--------

PACKAGING

Weight of Duct	112 kg/km
Print Marking	0000 m – Dura Line – LOT No 12345678 - DuraMulti -HDPE - 4x7/3,5 -2021/09/01

