






≥ 100mm thick rigid walls

Performance	EI 90 / E 240
Fire resistance	EN 1366-3
Classification	EN 13501-2
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%




Not at scale. Units in millimeters

Please refer to Installation Sheet for grouted devices CM250058

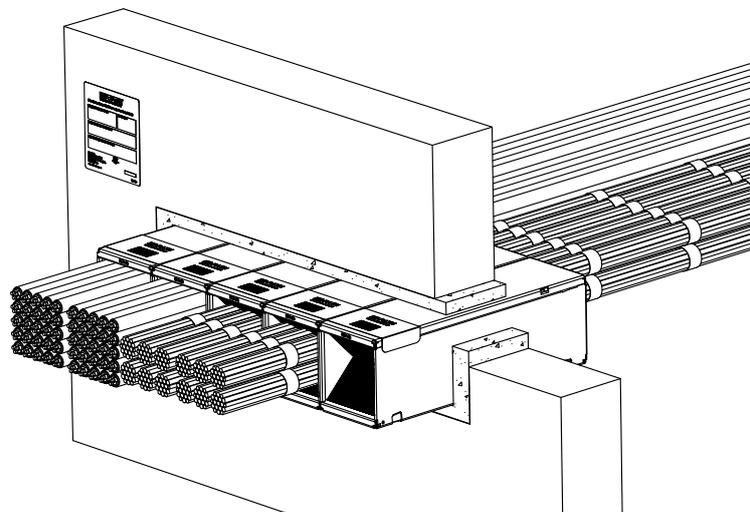


					
Opening	1 x CM250058*	2 x CM250058	3 x CM250058	4 x CM250058	5 x CM250058
X	138mm +/- 16mm	240mm +/- 16mm	342mm +/- 16mm	444mm +/- 16mm	546mm +/- 16mm
Y	143mm +/- 12mm	143mm +/- 12mm	143mm +/- 12mm	143mm +/- 12mm	143mm +/- 12mm

* : For 1 x CM250058 opening can be Ø155 mm (please refer to page 2/2)

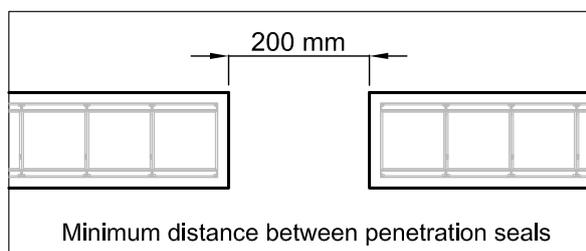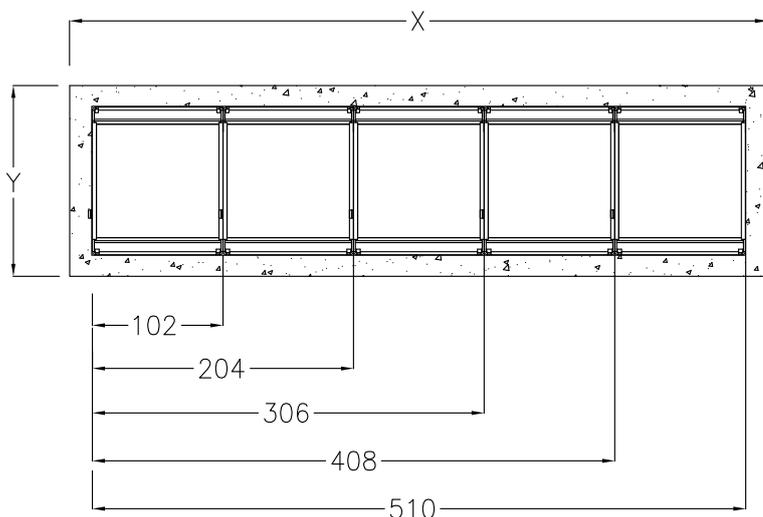

**CM250058
EZD44T**


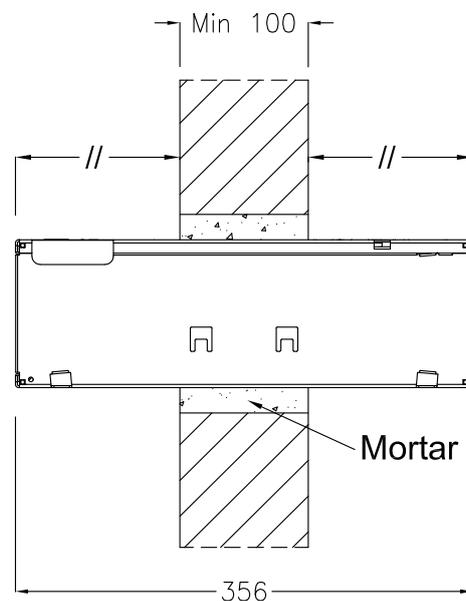


≥ 150mm thick rigid walls

Performance	EI 120 / E 240
Fire resistance	EN 1366-3
Classification	EN 13501-2
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%
Opening size	Ø152 mm - Ø155 mm

Not at scale. Units in millimeters

Please refer to Installation Sheet for grouted devices CM250058

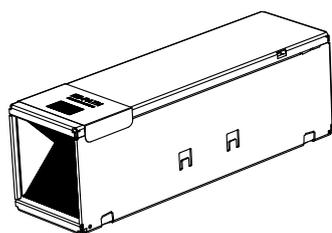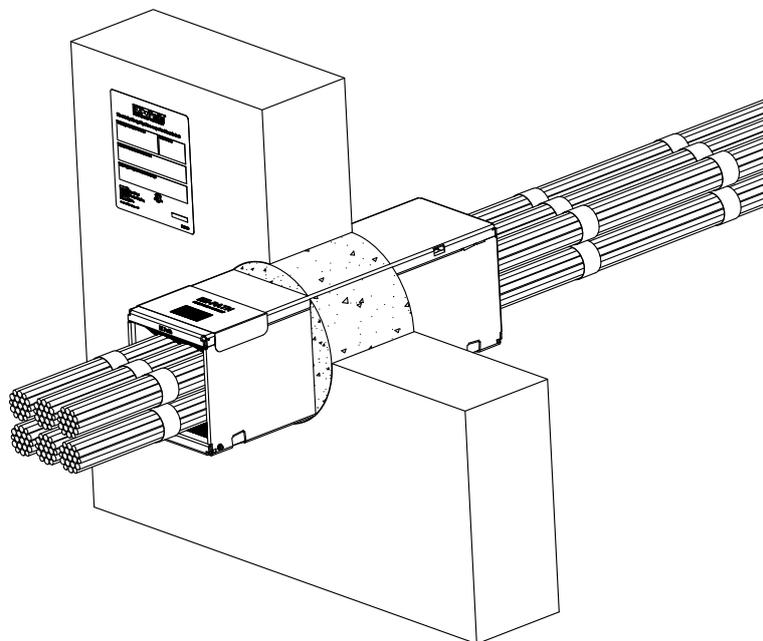

CM250058
EZD44T

