



CM250230 EZP144WT

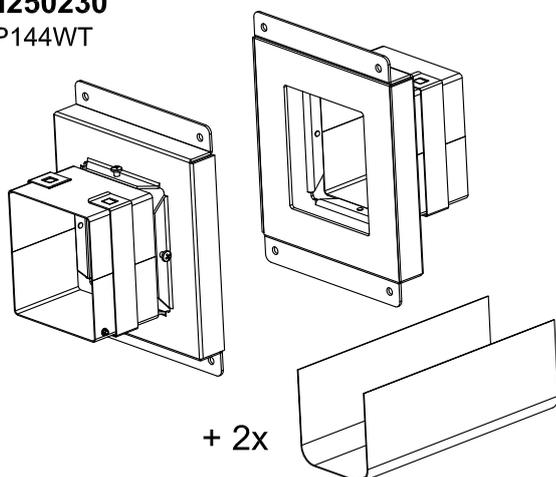


Please refer to CM250230 Application Sheet and Installation Sheet

CM250058 EZD44T

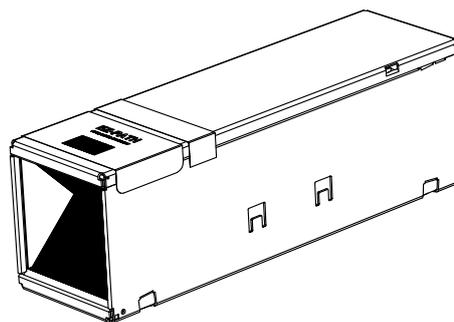

To be ordered separately

CM250230 + CM250058 EZP144WT + EZD44T

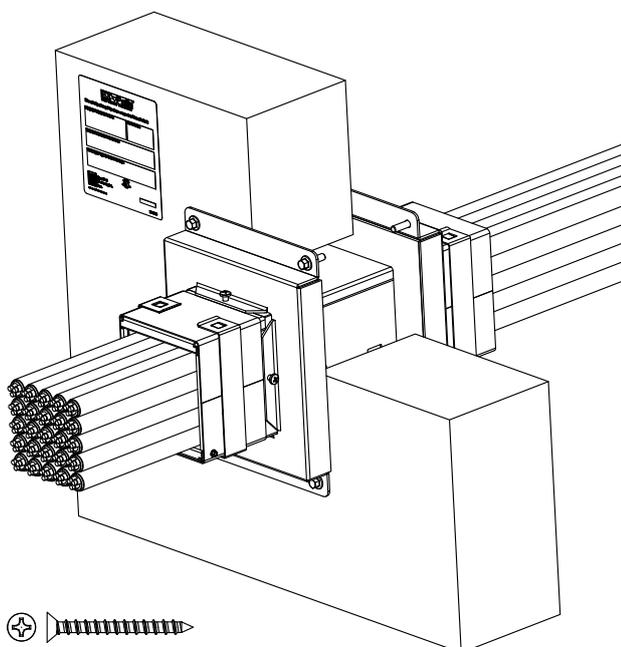

8x (Not included)

Ordering information



CM250230



2.52



1

Applications

For all types of cables up to Ø80mm OD
Flexible walls and rigid walls

Performance

Fire resistance : EN1366-3
Classification : EN13501-2
European Technical Assessment ETA – 13/0993

Firestop handling

No handling required for the fire safety compliance

Dimensions

Plate dimensions : 237 x 178 mm
Opening dimensions : 118 x 105 mm or Ø155 mm