







Emtelle UK Ltd.
 Haughhead
 Hawick TD9 8LF
 United Kingdom

info@emtelle.com
 emtelle.com


Product Datasheet MHT 2808
Generic Specification DB metal-free (14/10)



Product Benefits

			
Microducts are tested according to IEC 60794-5	Blowing track: up to 2000m, route and fibre/cable dependent	Em-Liner for Low Friction and best blowing results	Pressure tight up to 15 bar

Application and Design

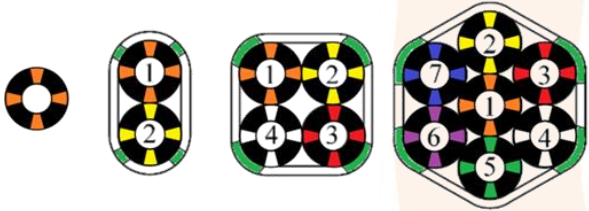

Inner surface:
 Smooth or ribbed + Em-Liner

Colour identification:
 Sheath and microduct colours for illustration only, to be defined at order placement.

Generic Details: Single Microduct

Material	RHDPE
Outer diameter	14.0mm
Inner diameter	10mm
Mass, nominal	71.9g/m
Min. bending radius of primary duct*	190mm
Max. pull tension, single duct	650N (65 kg)
Max. Blowing pressure	15 bar

*This radius relates to the microduct capability only and does not indicate a good radius for blowing FU.

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. www.emtelle.com

1. These m/ds are compatible with designated 14mm push-fit connectors.
2. Max air pressure for blowing: 15bar.

Generic Details: Microduct Bundle	
Material	Polyethylene HDPE
Wall thickness	1.1mm
Number single ducts	1-7

Product-Specific Details				
Type	Outer Diameter	Mass	Max. Pull Tension (Installation)	Min. Bend Radius
14/10mm				
1-WAY DBMF	14 mm	72 g/m	0.65 kN / 65 kg	14D
2-WAY DBMF	16.2 x 30.2 mm	220 g/m	1.8 kN / 180 kg	18D
4-WAY DBMF	36 mm across corners	394 g/m	3.0 kN / 300 kg	18D
7-WAY DBMF	44.2 mm	638 g/m	4.0 kN / 400 kg	18D

*After applying pulling tensions, allow time for pulled product to relax. See installation manuals

Sheath removal: Longitudinal sheath strippers can also be used to strip the sheath.

Radius for blowing: Recommend 1m radius or more (blowing mini-cable no smaller than 0.5m radius)

Operating Parameters	
Installation temperature	-20°C...+40°C
Transportation and storage temperature	-40°C...+60°C

Testing		
Tensile	IEC 60794-1-2-Method E1	Procedure to IEC 60794-5
Crush	IEC 60794-1-2-Method E3	Procedure to IEC 60794-5
Impact	IEC 60794-1-2-Method E4	Procedure to IEC 60794-5
Kink	IEC 60794-1-2-Method E10	Procedure to IEC 60794-5
Bend	IEC 60794-1-2-Method E11	Procedure to IEC 60794-5

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. www.emtelle.com