The omnidirectional antenna I-ATO5-43-350/6000 is designed for broadband in-building DAS applications supporting public safety, 4G/5G commercial wireless communication networks and WiFi/WLAN in all bands.

The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

FEATURES / BENEFITS


- Wideband omnidirectional antenna, supporting all wireless services in the frequency bands 350-520 / 600-960 / 1350-1550 / 1690-2700 / 3300-4200 / 4900-6000MHz
- · Aesthetical visual appearance, compact and light weight
- Indoor distribution of public safety, commercial wireless services and WiFi/WLAN
- PIM optimized antenna design (up to 153dBc @2x20W)
- Easy installation, ceiling mounting



Technical features

GENERAL SPECIFICATIONS							
Product Type		Omnidirectional Antenna					
Techn. Application		Indoor					
MECHANICAL SPECIFICATIONS							
Number of Input Ports		1					
Connectors		4.3-10 female					
Connector Cable	mm (in)	300 (11.81)					
Mounting Hardware included		Ceiling, via hole					
Height (Less Connectors)	mm (in)	10 (0.394)					
Diameter (Less Connectors)	mm (in)	290 (11.417)					
Weight	kg (lb)	0.5 (1.102)					
ELECTRICAL SPECIFICATIONS							
Frequenz	MHz	350-520	600-960	1350-1550	1690-2700	3300-4200	4900-600
Gain	dBi	3.0±1.0	3.0±1.0	4.0±1.0	4.0±1.0	5.0±1.0	5.0±1.0
/SWR	max	2.0	2.0	1.8	1.8	1.8	1.8
ntermodulation (IM3) (2x20W)	dBc	≤-153dBc	≤-153dBc	≤-153dBc	≤-153dBc	≤-153dBc	≤-153dBc
mpedance, Ohm	Ω	50					
Polarization		Horizontal					
Total Input Power max.	W	50					
MATERIAL							
Radome Material		ABS					
Radome Color		White (RAL 9003)					
TEMPERATURE SPECIFICATIONS							
Operation Temperature	°C (°F)	-55 to 60 (-67 to 140)					
TESTING AND ENVIRONMENTAL							
Environmental Class		Indoor					

I-ATO5-43-350/6000 REV : A REV DATE : 06 Jan 2023 **www.rfsworld.com**

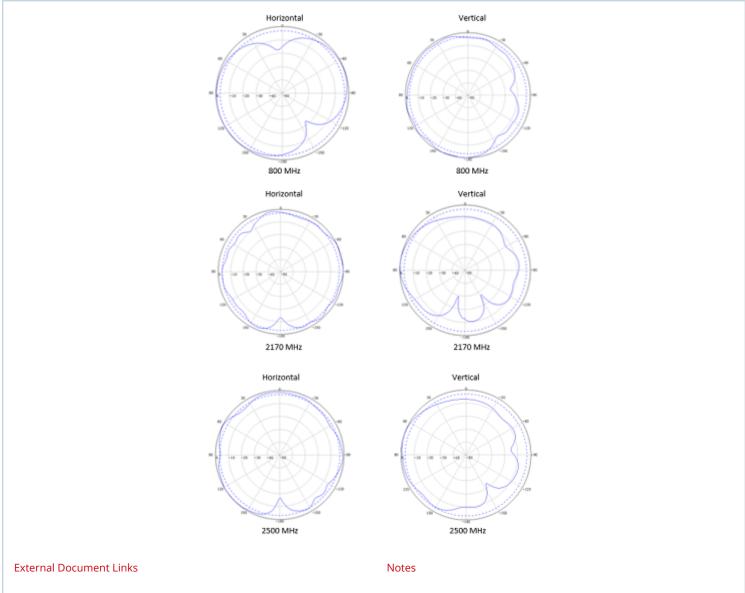

I-ATO5-43-350/6000 REV : A REV DATE : 06 Jan 2023 **www.rfsworld.com**