## N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment.

#### FEATURES / BENEFITS

- Cost effective two-piece design for safe and easy installation
- Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down
- Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up reduces the number of dropped calls and avoids revenue losses
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 68 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



NM-LCF12-C03

### **Technical features**

| GENERAL SPECIFICATIONS    |                 |                    |                 |  |
|---------------------------|-----------------|--------------------|-----------------|--|
| Transmission Line Type    |                 | Coaxial Cable      |                 |  |
| Cable Size                |                 | 1/2                |                 |  |
| Cable Type                | Foam Dielectric |                    | Radiating       |  |
| Model Series              | LCF12-50 Series | ICA12-50 Series    | RCF12-50 Series |  |
| Connector Interface       |                 | N                  |                 |  |
| Connector Type            |                 | OMNI FIT™ Standard |                 |  |
| Sealing Method            |                 | O-ring             |                 |  |
| Gender                    |                 | Male               |                 |  |
| ELECTRICAL SPECIFICATIONS |                 |                    |                 |  |

| Nominal Impedance, ohms              | Ohm       | 50   |
|--------------------------------------|-----------|--|
| 3rd Order IM Product @ 2x20<br>Watts | dBc       | -157 ; typical -160  |
| Maximum Frequency                    | GHz       | 6.0  |
| VSWR, Return Loss                    | VSWR (dB) | 0 < f ≤ 1.0 GHz: 1.03 (36.6)<br>1.0 < f ≤ 2.7 GHz: 1.04 (34.1)<br>2.7 < f ≤ 3.7 GHz: 1.08 (28.3)<br>3.7 < f ≤ 5.0 GHz: 1.15 (23.1)<br>5.0 < f ≤ 6.0 GHz: 1.25 (19.1) |

## **MECHANICAL SPECIFICATIONS**

| Plating Outer/Inner      |         | Trimetal/Silver |
|--------------------------|---------|-----------------|
| Length                   | mm (in) | 56.5 (2.23)     |
| Outer Diameter           | mm (in) | 22 (0.87)       |
| Inner Contact Attachment |         | Spring Finger   |
| Outer Contact Attachment |         | Spring C-Ring   |


#### **ACCESSORIES**

| Wrench size front | mm (in) | 20 (13/16)       |
|-------------------|---------|------------------|
| Wrench size rear  | mm (in) | 20 (13/16)       |
| Trimming Tool     |         | TRIM-SET-L12-C02 |

www.rfsworld.com NM-LCF12-C03 REV: B REV DATE: 07.Oct.2018



# N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

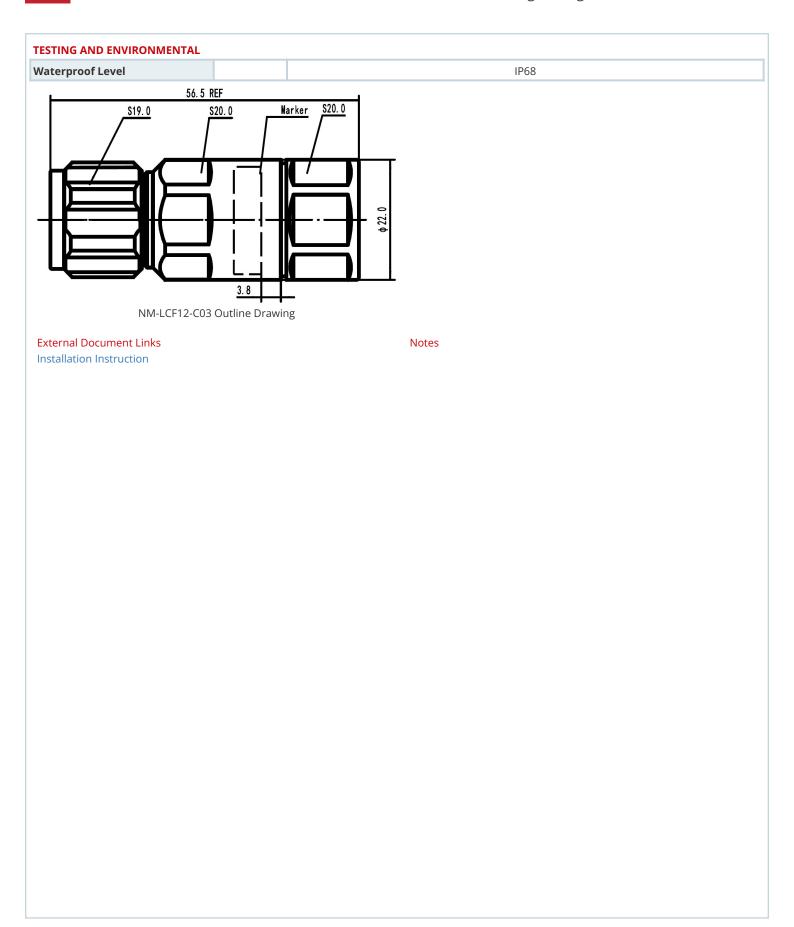

NM-LCF12-C03 REV : B REV DATE : 07.Oct.2018 WWW.rfsworld.com