# **DuraFit Connector**



## **KEY TECHNICAL PARAMETERS**

#### Material

Body: Clear Polyamide (PA) Grip: Stainless steel Cover: Polypropylene (PP) Clips: PP

#### Temperature

Installation: -15 °C to +45 °C Operation: -15 °C to +45 °C Transport and storage: -15 °C to +45 °C

#### Pressure

Installation: 25 bar Operation: 15 bar

#### Others

UV Resistant: No Operational lifetime: 25+ years Impact resistance: 1 joule (5 joules with cover) Insertion force: ≤ 50 N

#### **Standards**

General: EN 50411-2-8 Lifetime: 1,000-hour aging at 95 °C


## **PRODUCT DESCRIPTION**

Make connections between MicroDucts quickly and easily without the need for tools. Transparent design affords greater control when connecting MicroDucts and enables visual confirmation of the presence of a cable. An optional cover provides increased impact resistance.

### **APPLICATION AREA**

For use with MicroDucts in direct-buried or sub-duct applications.

# **TECHNICAL SPECIFICATIONS**

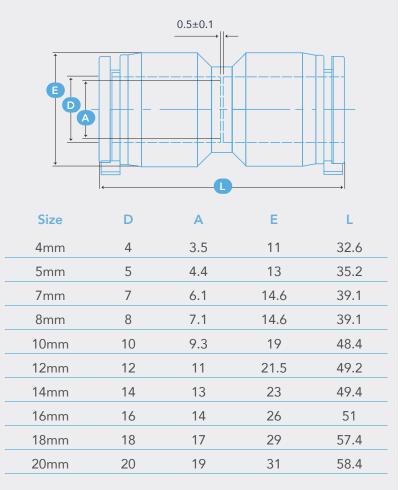





# **PRODUCT VARIATIONS**

Material Description	Weight (g)	Pull out force (N)	Packaging Volume (pcs)	SAP code
DuraFit Connector 4mm with clips	4	80	100	20073179
DuraFit Connector 5mm with clips	6	130	100	20073164
DuraFit Connector 7mm with clips	7	200	100	20073165
DuraFit Connector 8mm with clips	8	300	100	20073180
DuraFit Connector 10mm with clips	16	350	100	20073166
DuraFit Connector 12mm with clips	18	475	100	20073167
DuraFit Connector 14mm with clips	19	600	100	20073168
DuraFit Connector 16mm with clips	33	585	100	20073169
DuraFit Connector 18mm with clips	37	890	100	20073181
DuraFit Connector 20mm with clips	38.6	1200	100	20073170
DuraFit Connector 7mm with cover	11.9	200	100	20073171
DuraFit Connector 8mm with cover	11.3	300	100	20073177
DuraFit Connector 10mm with cover	21.8	350	100	20073172
DuraFit Connector 12mm with cover	25.3	475	100	20073173
DuraFit Connector 14mm with cover	26.4	600	100	20073174
DuraFit Connector 16mm with cover	36.8	585	100	20073175
DuraFit Connector 18mm with cover	39.7	890	100	20073178
DuraFit Connector 20mm with clover	50.3	1200	100	20073176



