UFXLULUK2



Ultra Low Loss OM4, LC/UPC Uniboot to LC/UPC Uniboot, 1.5 mm Duplex Fiber Patch Cord, Low Smoke Zero Halogen/Riser

- Patch cords using Uniboot technology combine, modularity, flexibility with easy insertion and removal from connectivity
- Uniboot connectors feature an adjustable polarity via a manual and independent rotation of each single connector body without exposing the fibers
- Uniboot technology features a push-pull mechanism operated by squeezing the connector boot

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber patch cord, duplex

Product Brand SYSTIMAX ULL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

Color, connector A Beige

Color, connector B Beige

Interface, Connector A LC/UPC

Interface Feature, connector A Uniboot

Interface, Connector B LC/UPC

Interface Feature, connector B Uniboot

Jacket Color Aqua

Total Fibers, quantity 2

Dimensions

Cable Assembly Length Range (m) 1 - 999


Cable Assembly Length Range (ft) 1 - 999

Diameter Over Jacket 1.5 mm | 0.059 in

Ordering Tree



UFXLULUK2

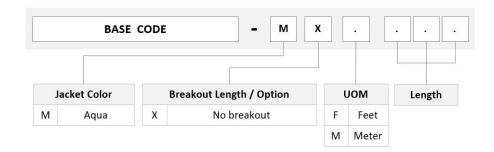

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Insertion Loss, maximum0.15 dBInsertion Loss, typical0.13 dBReturn Loss, minimum35 dB

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+60 \,^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F}$)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted





Included Products

760251280 N-002-DU-5K-M15AQ/AY/LTS Fiber Indoor Cable, LazrSPEED® Low Smoke Zero Halogen Light Duty Interconnect, 2 fiber, Multimode OM4, Gel-free, Meters jacket marking, Aqua jacket color

Page 2 of 3

UFXLULUK2

860660825

LC UniBoot 1.5 mm Multimode Aqua LC UNIBOOT duplex connector

